

● Tested, 300 Pounds


No. 125



For a small extra charge bottoms and legs can be furnished with all the small heaters. If desired a swing direct draft door and a swing check door and frame for automatic draft regulation will be furnished at a small extra charge.

No.	Ht.	Grate Diam.	Tap-pings	Cap. Gal. 25°	Cap. Gal. 40°	Depth of Fire	Wt.	Smoke Collar
125	25"	10"	1"	125	75	12"	115 lbs.	5"


COMBINED INCINERATOR and TANK HEATER

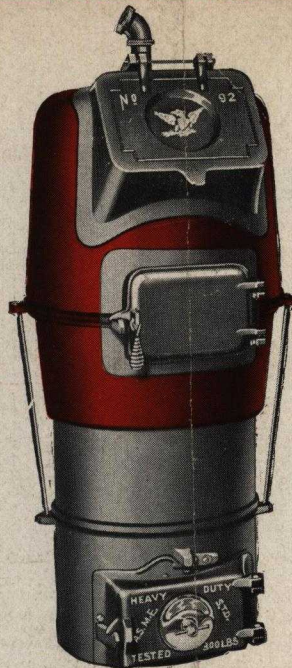

Heat a 66 gallon hot water supply tank and at the same time solve the garbage problem. It can be done at a very small difference in first cost and no added after cost. The incinerating compartment will hold half a bushel. The outlet connection is at the top of the heater, the inlet is at the back, a very handy arrangement from an installation standpoint.

No.	Ht.	Grate Diam.	Tap-pings	Cap. Gal. 25°	Cap. Gal. 40°	Depth of Fire	Wt.	Smoke Collar
92	34"	10"	1"	92	66	10"	160 lbs.	5"

SEVEN NEW HOT WATER SUPPLY BOILERS - - A NEW INCINERATOR

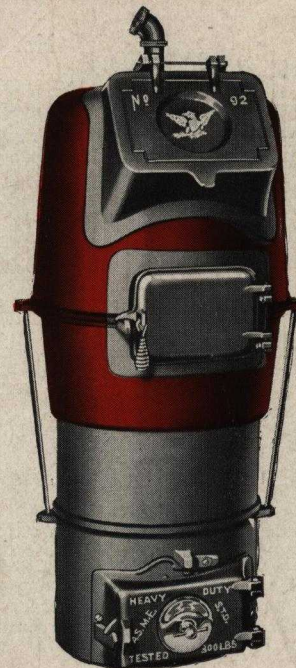

The American Boiler & Foundry Co.

MILAN

::

MICH.

A Hot Water Supply Boiler For Every Pocketbook

IF DESIRED, THESE HEATERS CAN BE FURNISHED WITH COPPERIZED, GALVANIZED OR BRASS WATER SECTIONS



No. 55



No. 65



No. 90



No. 95



No. 130



No. 140

By adding the seven hot water supply boilers described in this folder to the AMERICAN line, which already comprises the following heaters; 70, 80, 150, 210, 250, 275, 400, 312 and eleven larger heaters ranging in size from 15" to 28" in two series, we are offering the trade a most complete line of tank heaters. There are ten heaters having 10" grates, everyone of which is constructed with a subpot so as to greatly increase the length of firing.

The grate in these little heaters is so made that the fire may be cleaned thoroughly by rocking it slightly back and forth and clinkers the size of your fist or larger can be dumped into the ashpit by simply releasing a catch and turning the grate a quarter turn to the right.

No.	Ht.	Grate Diam.	Tap-pings	Cap. Gal. 25°	Cap. Gal. 40°	Depth of Fire	Wt.	Smoke Collar
55	17"	10"	1"	55	40	6	82 lbs.	5"
65	19"	10"	1"	65	45	7	85 lbs.	5"

No.	Ht.	Grate Diam.	Tap-pings	Cap. Gal. 25°	Cap. Gal. 40°	Depth of Fire	Wt.	Smoke Collar
90	19"	10"	1"	90	66	9"	103 lbs.	5"
95	22"	10"	1"	95	66	10"	105 lbs.	5"

No.	Ht.	Grate Diam.	Tap-pings	Cap. Gal. 25°	Cap. Gal. 40°	Depth of Fire	Wt.	Smoke Collar
130	22"	10"	1"	130	80	12"	118 lbs.	5"
140	24 3/4"	10"	1"	140	82	13"	120 lbs.	5"